




G SCALE WOOD-SIDED CABOOSE

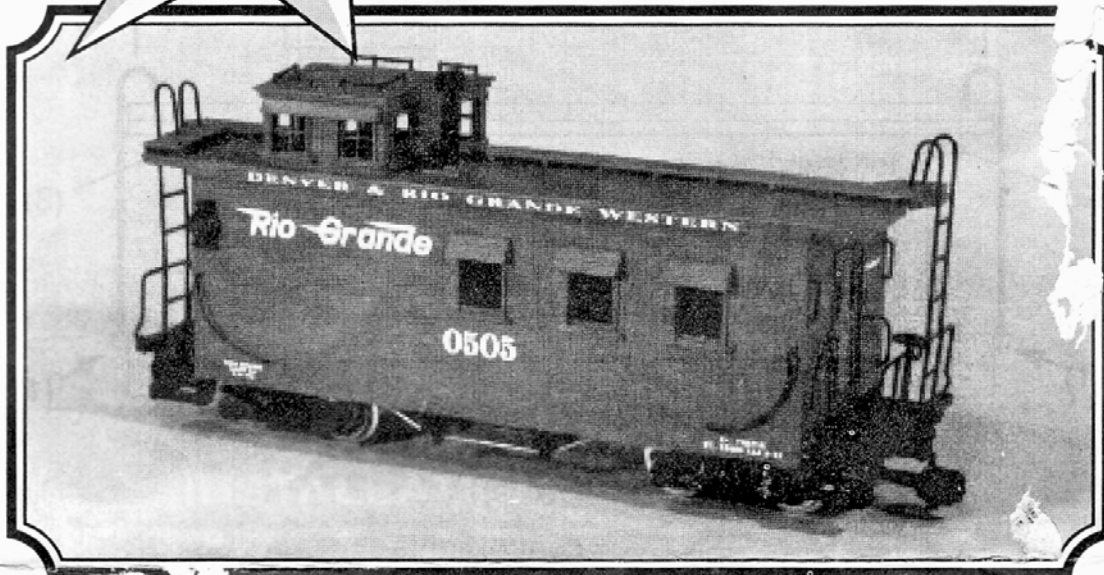

Dear Customer,

Congratulations on your Purchase of a highly detailed, high quality G Scale wood-sided caboose. This unit is equipped with a rechargeable battery circuit which will allow the marker lights to remain illuminated while the caboose remains stopped in your freight yard. This feature is unique to USA Trains and shows that we are committed to providing you with the best possible products at a reasonable price.

We thank you for your support and hope you enjoy our products.


Sincerely

Charlie


INSTRUCTIONS FOR WOOD-SIDED CABOOSE (PL)

RECHARGEABLE BATTERY INSTALLATION NECESSARY FOR MARKER LIGHTS TO STAY LIT

Remove Ladders on BOTH ends as Follows:

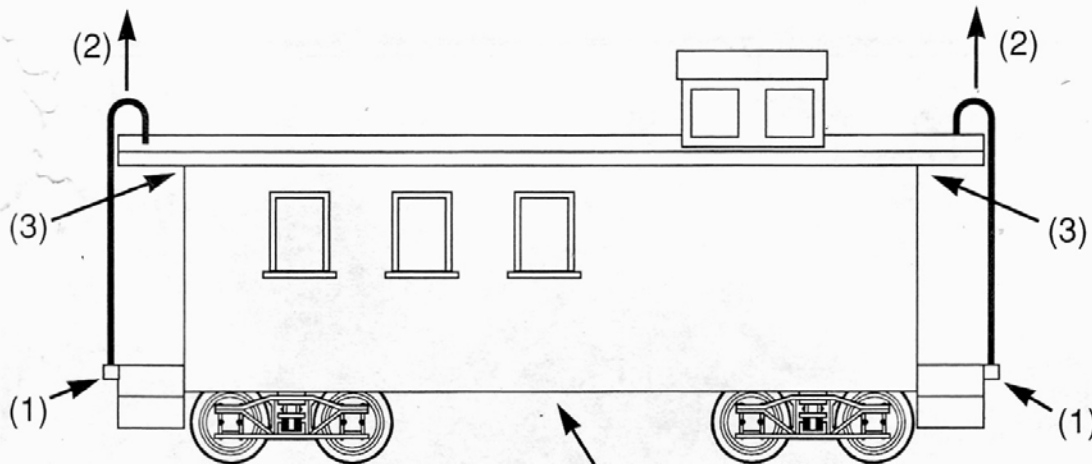

(6)
Switch to
control lights

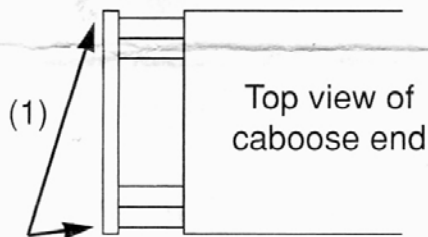

Grab at two ends

- (1) Grab ends of platform and slide away from caboose so it is slightly detached from caboose
- (2) Slide whole handrail assembly up so handrails detach from roof
- (3) Remove screws from both ends of caboose and remove roof
- (4) Open battery compartment on inside of caboose and install a 9 volt nicad rechargeable battery (we recommend Radio Shack #23-1265). Make sure (+) and (-) are correctly matched

EASE READ BEFORE YOU OPERATE CABOOSE)

- (5) Reassemble caboose - make sure you put the handrails in roof first and then slide handrail assembly back onto caboose underframe
- (6) Use the three position switch on the bottom of the caboose to select your light operation

Three Position Switch


Marker Lights remain on without track power	ALL LIGHTS OFF	Both interior & marker lights on with track power
---	----------------	---

OPTIONAL SMOKE UNIT INSTALLATION INSTRUCTIONS

USA Trains has designed this unit so installation of a working smoke stack is simple. Pull out the non-working smoke stack and insert a seuthe #7 smoke unit. Solder the two wires to the two brass strips on the roof (one wire to one strip and the other wire to the other strip).

INSTALLATION INSTRUCTIONS FOR USA KNUCKLE COUPLER

- (1) Remove Hook & Loop coupler.
- (2) Clip tab "A" from end of tongue and file smooth.
- (3) Attach USA knuckle coupler "B" with #4 screw (C) provided.

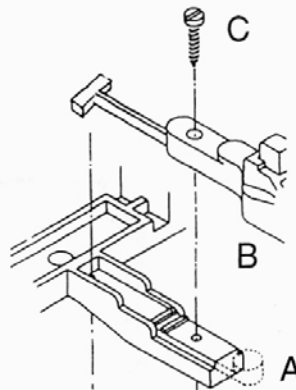

**PLEASE LOOK FOR OUR OTHER
FINE PRODUCTS AT YOUR
LOCAL DEALER**

- NW-2 Diesel Switcher •
- Operating Rotary Snowplow •
 - 25 Ton Operating Crane •
 - Complete Work Train •
- Piggy Back Flat Car with Trailer •
- Wood Sided Refrigerator Cars •
 - Two-Tier Auto Carrier •
 - Steel-Sided Box Cars •
 - Outside Braced Box Cars •
- Operating Generator Car with Sound •
 - Flat Car with Pipe Loads •



**USA Trains
P.O. Box 100
Malden, MA 02148**